



# UFL to N-Female bulkhead pigtail up to 6GHz



Designed for 802.11B/G and 802.11A

Water tight rubber gasket

Indoor and outdoor use

Tested for 6 GHz use

Easy installation


Thin cable with low loss

Single hole chassis part for easy assembly

Gold plated connector contact for low resistance

## Specifications

Contact material	Copper allow with Gold Plate
Contact resistance	20 mOhm Max
Cable Length	20 cm
Operating Temperature	-40 deg C to +125 deg C
Weight	50 gr
Insertion loss	Max 1,5 dB
Hole diameter	16 mm

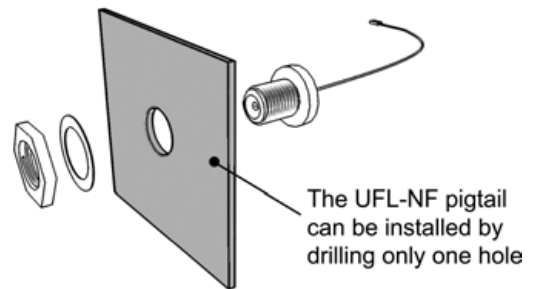

Frequency	S11	S21	S22	S12
2 GHz	-21 dB	-0,7 dB	-22 dB	-0,7 dB
2,4 GHz	-20,5 dB	-0,7 dB	-24 dB	-0,7dB
3 GHz	-24 dB	-0,8 dB	-29 dB	-0,8 dB
5,2 Ghz	-17 dB	-1,2 dB	-18 dB	-1,2 dB
6 GHz	-19 dB	-1,25 dB	-24 dB	-1,3 dB

