



RP-SMA chassis to RP-SMA cable

Rubber gasket for water tight protection

Designed for WiFi

Easy to built in

Gold plated

Low loss


High quality pigtail

Single 6 mm hole installation

Flexible 5 mm CDF-200 cable



Length ca. 2 m

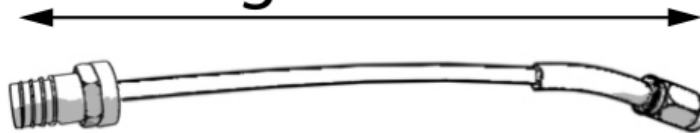

Gold plated RP-SMA chassis



Gold plated RP-SMA

RP-TNC chassis to RP-TNC cable

Chrome and gold plated

Designed for WiFi

Easy to built in

Low loss


High quality pigtail

Flexible 5 mm CDF-200 cable

Single 12 mm hole installation



Length ca. 2 m

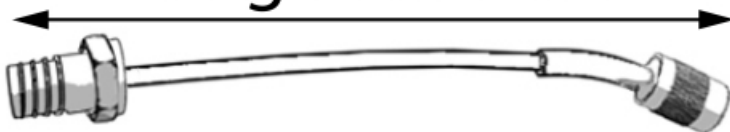

Chrome- and gold plated RP-TNC



Chrome- and gold plated RP-TNC chassis

