



PS20W Universal 20 watt power supply



- Designed for voltage between 5 and 24Vdc
- Output selectable by a changeable slot
- Easily changeable polarity
- Load protection
- Small size
- Current protection
- Overheating protection
- Low power consumption
- Including 8 different size plugs
- Powerful 20 Watt output power
- Suitable for almost every device

Specifications


Input Voltage	100 - 240 Volt AC										
Input Current	Max. 4A										
Input frequency	50 / 60 Hz										
Output Volt.(5-14V)	5	6	7	8	9	10	11	12	13	14	
Max. Current (A)	4	3.5	3.3	3.2	3.0	2.8	2.6	2.5	2.4	2.3	
Output Volt.(15-24V)	15	16	17	18	19	20	21	22	23	24	
Max. Current (A)	2.2	2.1	2.0	1.9	1.8	1.7	1.6	1.6	1.5	1.5	
Features	Switching regulated power supply										
	Load protection										
	Current protection										
	Overheating protection										
	Low power consumption										
Dimensions	45 x 28 x 95 mm										
Weight	166 g										
Approval	CE / GS										



Output Voltage selectable by changing plugin



Easily changeable different plug sizes

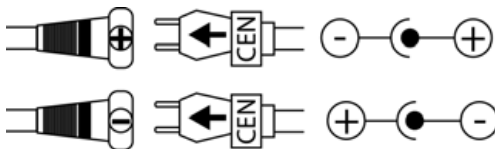

By flipping the polarity connector you can easily change the polarity. Please be sure to select the correct polarity and voltage before connecting your device. Do not change the voltage and change polarity when the power supply is operating.

Plug sizes (mm)

- 1 6,3 x 3
- 2 5,5 x 2,5
- 3 5,5 x 2,1
- 4 5 x 2,1
- 5 4,95 x 1,98
- 6 4 x 1,7
- 7 3,5 x 1,35
- 8 3,5 x 1

